

C L E A N F I R E S Y S T E M

XARALYN®



Decorative Fireplaces





Ambiance FP



MDF (Available in RAL9010 and RAL9005)

H 2700 | W 1135 | D 320 mm
Height adjustable by any height



MDF (Available in RAL9010 and RAL9005)

H 2700 | W 1135 | D 320 mm
Height adjustable by any height

Compatible with:

Bioethanol



Bio ethanol burner XL (8014LS)

Electric



Cassette 600

Cadiz





Natural stone



H 950 | W 980 | D 375 mm





Natural stone



H 950 | W 980 | D 375 mm





MDF (RAL 9010)

H 950 | W 980 | D 375 mm





Natural stone



H 950 | W 980 | D 685 mm

Compatible with:

Bioethanol



Built-in unit L



Built-in unit L with stone effect



Built-in unit L with medallion

Electric



Levico 70 LED fire



Lucius LED fire



Built-in unit Cassette 600



Albany



F02 Polished



F02 Unpolished



F03 Polished



F03 Unpolished

7



Natural stone F02



H 1080 | W 1190 | D 390 mm



Natural stone



H 1080 | W 1190 | D 390 mm



MDF (RAL 9010)

H 1080 | W 1190 | D 390 mm



Natural stone




H 1080 | W 1190 | D 788 mm

Compatible with:

Bioethanol



Built-in unit L



Built-in unit L with stone effect



Built-in unit L with medallion

Electric



Levico 70 LED fire




Lucius LED fire




Built-in unit Cassette 600



Albany




F02 Polished



F02 Unpolished



F03 Polished



F03 Unpolished



Kreta & Kreta mini





Natural stone



Kreta: H 1100 | W 1200 | D 540 mm
Kreta mini: H 990 | W 1050 | D 445 mm





Natural stone



Kreta: H 1100 | W 1200 | D 540 mm
Kreta mini: H 990 | W 1050 | D 445 mm

Compatible with:

Bioethanol



Built-in unit L



Built-in unit L with stone effect



Built-in unit L with medallion

Electric



Levico 70 LED fire



Lucius LED fire



Built-in unit Cassette 600



Albany



Louis



Compatible with:





Marvik



MDF (RAL 9010)

H 1000 | W 1330 | D 330 mm

By keeping our production closeby, we have better quality control, shorter delivery times, we use less packaging and we use less energy for transport, which will give an environmental benefit.

This means that it is sometimes necessary to pay more at first sight, but the products have a longer lifespan in the end.

For example, we use FSC certified wood for the production of our wooden fireplaces (MDF). This wood is extracted from sustainably managed forests. Due to the difference in humidity, the chance of working (warping) of MDF products imported from Asia is considerable. Therefore this choice offers more than just an environmentally friendly alternative.

“Made in Europe” is therefore a conscious choice.

Compatible with:

Bioethanol



Built-in unit L

Electric



Levico 70 LED fire



Built-in unit
Cassette 600



Albany



Milos



Natural stone

H 970 | W 995 | D 340 mm

A Xaralyn fireplace is a combination of a surround and insert or built-in fire.

In most cases, Xaralyn fireplaces can be combined with various electric or bioethanol built-in fires. First you choose a surround, then you determine the material or color. You can further personalize this fireplace by choosing from the various electric or bioethanol built-in fires. For some fireplaces, more than 40 combinations are possible in this way.

Our natural stone surrounds are unique. Each surround made of natural stone is finished by hand and has a unique look. The final result is a unique surround with a vintage look.

On a wooden base we stick a layer of natural stone, fossil stone, on a wooden base, which is then evened out. The final result is a completely natural stone open fire with a relatively low weight. By keeping the weight low, the fire is much easier to move and therefore becomes more a piece of furniture.

Compatible with:

Bioethanol



Bio ethanol burner S (4114LB)

Electric



Cassette 400



Milano



Concrete look

H 900 | W 760 | D 300 mm

The Milano is including:

Bioethanol



Bioethanol burner S (4114S)

Nuoro



Concrete look

H 1195 | W 760 | D 350 mm

The Nuoro is compatible with:

Bioethanol



Bioethanol burner L (5820LB)

Electric



Cassette 600



Nero



Natural stone



H 1015 | W 1195 | D 360 mm



Natural stone



H 1015 | W 1195 | D 360 mm

Compatible with:

Bioethanol



Built-in unit L



Built-in unit L
with stone effect



Built-in unit L
with medallion

Electric



Levico 70 LED fire



Lucius LED fire



Built-in unit
Cassette 600



Albany



Santos



Natural stone



H 1000 | W 1300 | D 470 mm



Natural stone



H 1000 | W 1300 | D 470 mm

Compatible with:

Bioethanol



Bio ethanol burner L (5820LB)

Electric



Trivero 90 LED fireplace



Cassette 600



Todos



Natural stone

H 1000 | W 780 | D 405 mm

Choose for a vintage look with our natural stone fireplaces. These fossil stone fireplaces are hand finished and have a 'lived-in' look. Each copy is unique, irregularities in colour and finish are part of the design and give the end product character.



Compatible with:

Bioethanol



Bioethanol burner S (4114LB)

Electric



Cassette 400



Elin



MDF (RAL 9010)

H 450 | W 1800 | D 445 mm

Compatible with:

Bioethanol



Bioethanol burner S (4114LS)



Cuneo



Concrete look

H 105 | W 530 | D 260 mm

Woody



Resin

H 125 | W 495 | D 230 mm

Including:

Bioethanol



Bioethanol burner S (4114LS)



Lasize



MDF (RAL9010)



With rollers

H 1360 | W 980 | D 358 mm



Concrete look



With rollers

H 1360 | W 980 | D 358 mm

Compatible with:

Bioethanol



Bioethanol burner L (5820LB)

Electric



Cassette 600



Shigo



Natural stone

H 850 | W 900 | D 400 mm

Including:

Bioethanol



Bioethanol burner S (4114LB)



Silo hanging



Steel

Including fitted bioethanol burner

H 500 | W 450 | D 450 mm

Silo



Steel



With rollers

Including fitted bioethanol burner

H 850 | W 450 | D 450 mm

Disegno S90

A modern, low-profile electric fireplace with a white finish and a wide, rectangular opening. It features a realistic flame effect and log display.



MDF (Available in RAL9010 and RAL9005)

H 470 | W 900 | D 320 mm

Disegno S120

A modern, low-profile electric fireplace with a white finish and a wide, rectangular opening. It features a realistic flame effect and log display.



MDF (Available in RAL9010 and RAL9005)

H 470 | W 1200 | D 320 mm

Disegno XL 90

A tall, narrow electric fireplace with a black finish. It features a realistic flame effect and log display.



MDF (Available in RAL9010 and RAL9005)

H 470 | W 900 | D 320 mm
Height adjustable to ceiling

Disegno XL 120

A tall, narrow electric fireplace with a white finish. It features a realistic flame effect and log display.




MDF (Available in RAL9010 and RAL9005)

H 2700 | W 1200 | D 320 mm
Height adjustable to ceiling

Including:

Electric



S90
Levico 90 3D LED




S120
Levico 120 3D LED

Including:

Electric



XL 90
Levico 90 3D LED



XL 120
Levico 120 3D LED

Goya



MDF (RAL9005)
Including Bioethanol burner S (4114B)

H 650 | W 970 | D 190 mm



MDF (RAL9010)
Including Bioethanol burner S (4114B)

H 650 | W 970 | D 190 mm



Concrete look
Including Bioethanol burner S (4114B)

H 650 | W 970 | D 190 mm



Broken stone
Including Bioethanol burner S (4114B)

H 650 | W 970 | D 190 mm



Nova



Concrete look

H 620 | W 600 | D 300 mm



MDF (RAL 9010)

H 620 | W 600 | D 300 mm

The Nova concrete look is compatible with:

Bioethanol



Bioethanol burner S (4114LB)

Electric



Cassette 400

The Nova MDF is including:

Electric



Cassette 400

Quero



Steel

H 750 | W 600 | D 344 mm



Corten steel

H 750 | W 600 | D 344 mm



Stainless steel

H 750 | W 600 | D 344 mm



Natural stone

H 750 | W 600 | D 344 mm

Compatible with:

Bioethanol



Bioethanol burner S (4114LB)

Electric




Cassette 400

Trivero



Trivero 130
H 465 mm | W 1270 mm | D 140 mm
Consumption 15 Watt

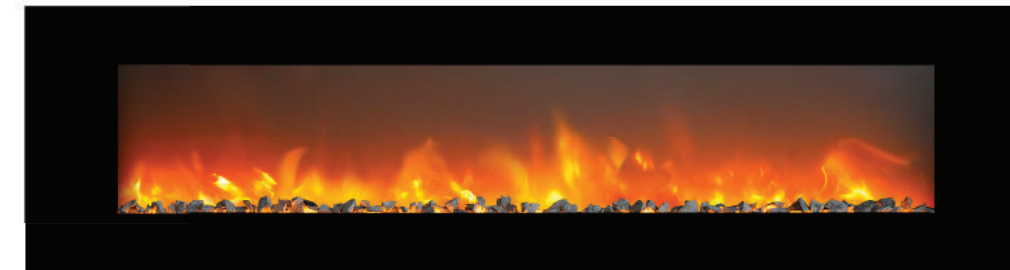

Trivero 180
H 465 mm | W 1830 mm | D 140 mm
Consumption 20 Watt



Wall-surround Trivero comes standard with basalt split.

- Maintenance-free
- Functions with LED lights
- Adjustable flames
- Remote control



- Thermostat
- Heating: 0 - 700 - 1400 Watt (to be programmed)
- Timer function



Umbria






MDF (RAL 9010)

H 650 | W 740 | D 340 mm

The Umbria is including:

Bioethanol



Bioethanol burner L (5820B)

Lucca






MDF (RAL 9010)

H 700 | W 740 | D 340 mm


The Lucca is compatible with:

Bioethanol




Bioethanol burner S (4114LB)

Electric



Cassette 600

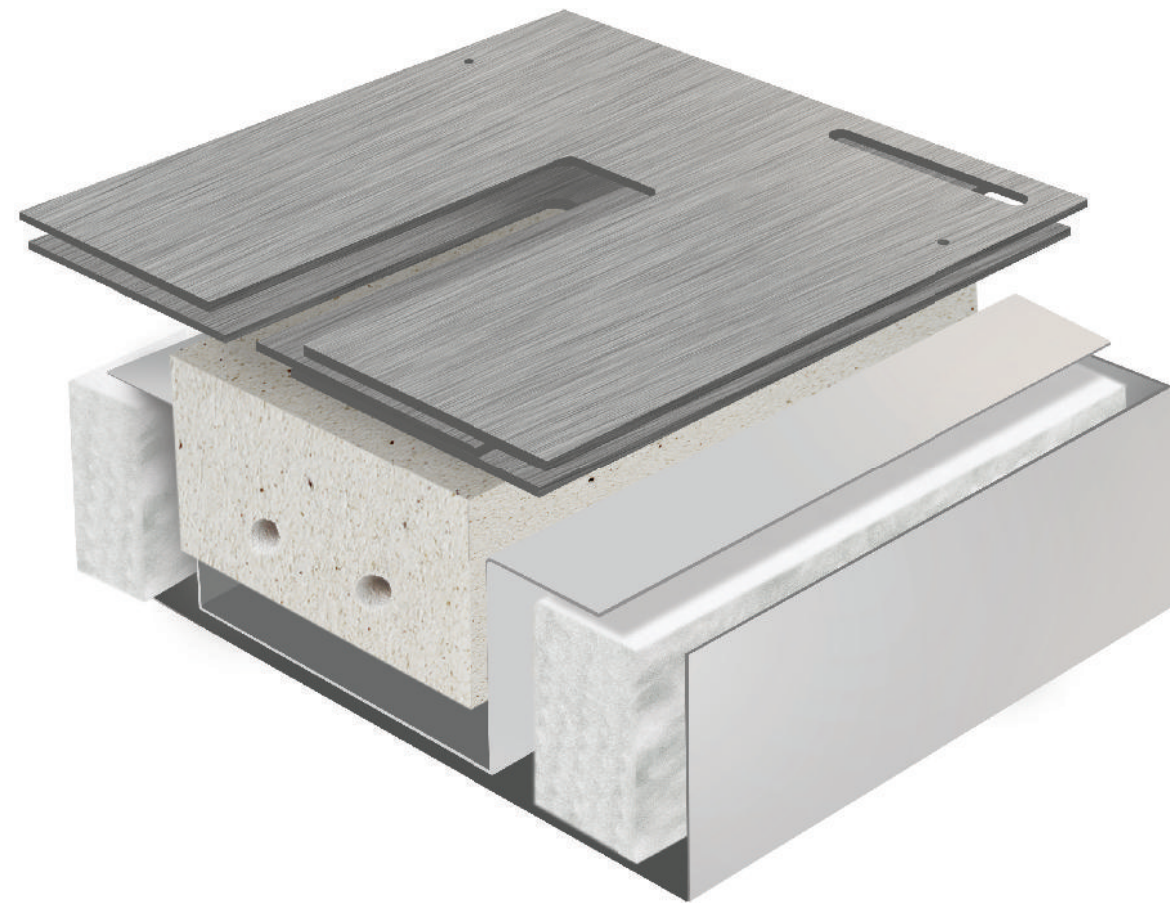

Safety comes first with Xaralyn. The filling opening is separate from the opening of the fire and due to the built in safety system it is impossible to fill the bioethanol burners while they are lit.

- The fire is created by gas that is formed when bioethanol is exposed to the air. Due to the gradual release of the gas, there is a constant combustion, making this the bioethanol burner very economical in use and the safest on the market.
- The complete bioethanol burner is made of high quality stainless steel
- Ceramic stone absorbs the bioethanol
- Ceramic wool in the outer case absorbs excess bioethanol in case of overfilling



EN 16647:2015



DIN 4734-1



Bioethanol burner S

(4114LS) With lip



H 80 | W 408 | D 137 mm
Top plate (lip): W 428 | D 157 mm

Burner contents: ± 1 liter
Burning time: ± 3 hours
Consumption per hour: ± 0,30 liter
Heat output: ± 2 KW

(4114LB) With lip



H 80 | W 408 | D 137 mm
Top plate (lip): W 428 | D 157 mm

Burner contents: ± 1 liter
Burning time: ± 3 hours
Consumption per hour: ± 0,30 liter
Heat output: ± 2 KW

Bioethanol burner S

(4114S) Without lip



H 80 | W 409 | D 137 mm

Burner contents: ± 1 liter
Burning time: ± 3 hours
Consumption per hour: ± 0,3 liter
Heat output: ± 2 KW

(4114B) Without lip



H 80 | W 409 | D 137 mm

Burner contents: ± 1 liter
Burning time: ± 3 hours
Consumption per hour: ± 0,3 liter
Heat output: ± 2 KW

All bioethanol burners contain a patented Clean fire System ceramic core. This core absorbs the bio ethanol completely, which makes it impossible for the fuel to leak or spill.



Bioethanol burner M

(4120B) Without lip



H 80 | W 405 | D 200 mm

Burner contents:	± 1,5 liter
Burning time:	± 3 hours
Consumption per hour:	± 0,3 liter
Heat output:	± 2,5 KW

Included with all burners

- Quickstart
- Manual
- Glass screens
- Connectors
- Lighter
- Funnel
- Operating sticks



Bioethanol burner L

(5820LS) With lip



H 80 | W 575 | D 198 mm
Top plate (lip): W 597 | D 220 mm

Burner contents: ± 2 liters
Burning time: ± 3,5 hours
Consumption per hour: ± 0,5 liters
Heat output: ± 3KW

(5820LB) With lip



H 80 | W 575 | D 198 mm
Top plate (lip): W 597 | D 220 mm

Burner contents: ± 2 liters
Burning time: ± 3,5 hours
Consumption per hour: ± 0,5 liters
Heat output: ± 3KW

Bioethanol burner L



H 80 | W 575 | D 200 mm

Burner contents: ± 2 liters
Burning time: ± 3,5 hours
Consumption per hour: ± 0,5 liters
Heat output: ± 3KW



H 80 | W 575 | D 200 mm

Burner contents: ± 2 liters
Burning time: ± 3,5 hours
Consumption per hour: ± 0,5 liters
Heat output: ± 3KW

Bioethanol burner XL

(8014LS) With lip



H 80 | W 800 | D 137 mm
Top plate (lip): W 820 | D 157 mm

Burner contents: ± 2,5 liter
Burning time: ± 3,5 hours
Consumption per hour: ± 0,55 liter
Heat output: ± 3,5KW

(8014LB) With lip



H 80 | W 800 | D 137 mm
Top plate (lip): W 820 | D 157 mm

Burner contents: ± 2,5 liter
Burning time: ± 3,5 hours
Consumption per hour: ± 0,55 liter
Heat output: ± 3,5KW

Bioethanol burner XXL


(11814LS) With lip



H 84 | W 1180 | D 137 mm
Top plate (lip): W 1200 | D 157 mm

Burner contents: ± 3,5 liter
Burning time: ± 3,5 hours
Consumption per hour: ± 0,65 liter
Heat output: ± 4,4 KW

(11814LB) With lip

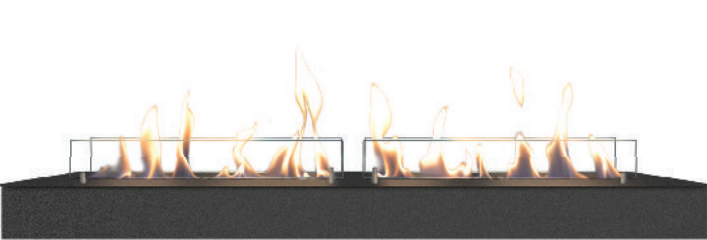

H 84 | W 1180 | D 137 mm
Top plate (lip): W 1200 | D 157 mm

Burner contents: ± 3,5 liter
Burning time: ± 3,5 hours
Consumption per hour: ± 0,65 liter
Heat output: ± 4,4 KW

Built-in units L



Steel

Built-in unit L FP 710 x 685 x 200 mm (HxWxD)



Steel

Built-in unit L FP 3S 523 x 620 x 239 mm (HxWxD)



Steel

Built-in unit L FP 3S 523 x 620 x 239 mm (HxWxD)



Steel

Built-in unit L FP 3S 523 x 620 x 239 mm (HxWxD)



Built-in units XL



Steel

Built-in unit XL FP H 538 | W 947 | D 217 mm (HxWxD)



Steel

Built-in unit XL FP 3S H 538 | W 947 | D 217 mm (HxWxD)



Steel

Built-in unit XL 2S L H 538 | W 947 | D 217 mm (HxWxD)



Steel

Built-in unit XL 2S R H 538 | W 947 | D 217 mm (HxWxD)

Built-in unit S



Steel
H 690 | W 500 | D 210 mm

Including Bioethanol burner M (4120B)

Built-in unit L



Steel
H 712 | W 680 | D 210 mm

Including Bioethanol burner L (5820B)



Steel
H 744 | W 690 | D 225 mm

With stone Effect
Including Bioethanol burner L (5820B)



Steel
H 744 | W 690 | D 225 mm

With medallion
Including Bioethanol burner L (5820B)



Built-in unit XXL



Steel

H 536 | W 1330 | D 217 mm

Including Bioethanol burner XXL (11814LS)
Removable backwall

Optional with Finishing frame

Built-in profiles



H 3 | W 530 | D 260 mm

Available in black or brushed stainless steel


Including bioethanol burner S (4114L)



H 3 | W 695 | D 320 mm

Available in black or brushed stainless steel


Including bioethanol burner L (5820L)



H 3 | W 920 | D 260 mm

Available in black or brushed stainless steel

Including bioethanol burner XL (8014L)

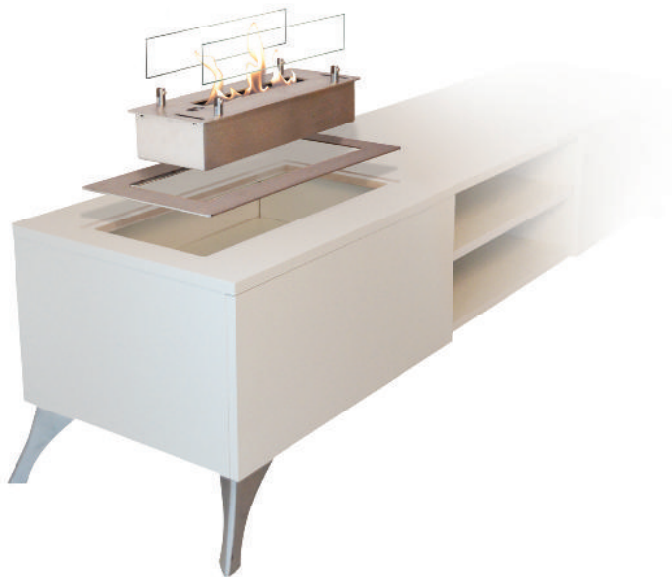

The built-in profile is designed for use in combination with the bioethanol burner. The profile protects your project or furniture against the heat that is produced by the bioethanol burner and makes installation easier.



Castello



Can be mounted on a wall or
be used as a built-in fire



Steel

H 730 | W 740 | D 320 mm

- Consumption 25 Watt
- Control with app
- Maintenance-free
- Remote control
- Thermostat
- Functions with LED lights
- Adjustable flames
- Heating: 0 – 600 – 1200 Watt (to be programmed)



Levico



Levico 90
H 410 | W 915 | D 248 mm
Consumption 15 Watt




Levico 120
H 410 | W 1215 | D 248 mm
Consumption 20 Watt



Delivered including resin logset and perspex inlay. Use the perspex inlay to personalize this fireplace with real wood.

- Consumption 15 Watt
- Maintenance-free
- Functions with LED lights
- Adjustable flames
- Remote control
- Timer
- Heating Levico: 0 - 700 – 1400 Watt (to be programmed)





Lucius



H 610 | W 620 | D 195 mm

- Consumption 10 Watt
- Maintenance-free
- Remote control
- Thermostat
- Functions with LED lights
- Adjustable flames
- Heating: 0 – 700 – 1400 Watt (to be programmed)

Elski



H 665 | W 470 | D 205 mm

- Consumption 10 Watt
- Maintenance-free
- Remote control
- Thermostat
- Functions with LED lights
- Adjustable flames
- Heating: 0 – 650 - 1300 Watt (to be programmed)

Levico 70




H 690 | W 660 | D 197 mm

- Consumption 10 Watt
- Maintenance-free
- Including basalt split
- Functions with LED lights
- Adjustable flames
- Remote control
- Thermostat
- Heating: 0 - 700 – 1400 Watt (to be programmed)





Trivero 90

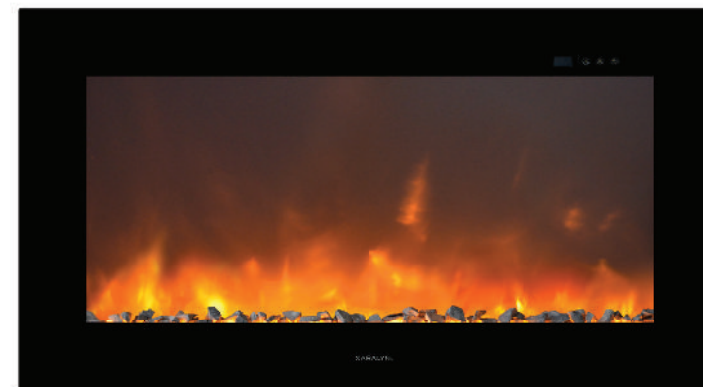

H 560 | W 1040 | D 140 mm



- Consumption 15 Watt
- Maintenance-free
- Including basalt split
- Functions with LED lights
- Adjustable flames
- Remote control

An electric fireplace from Xaralyn is a beautiful and easy way to create the effect of a real fire.

The technique of a fireplace with an electric built-in fire is created by light projection. In combination with logs, which have a glowing effect, a very realistic flame is created. Most electric fireplaces have different light settings and are equipped with a remote control.

An electric LED fireplace is completely maintenance-free. If the LED fireplace is only used for decoration, the power consumption is negligible.

Basket Cassette 400



H 330 | W 405 | D 216 mm

- Consumption 200 Watt
- Adjustable flame image
- Remote control

Basket Cassette 600



H 340 | W 564 | D 218 mm

- Consumption 200 Watt
- Adjustable flame image
- Remote control


Built-in unit 600



H 720 | W 700 | D 275 mm

- Consumption 200 Watt
- Adjustable flame image
- Remote control

Albany



H 705 | W 640 | D 295 mm

- Consumption 220 Watt
- Adjustable flame image
- Remote control with LCD display
- LED logset
- Heating: 0 - 750 - 1500 Watt (to be programmed)
- Including side cover

Logset 6 pieces




Logset 10 pieces



White pebbles 5kg



Basalt split 4kg

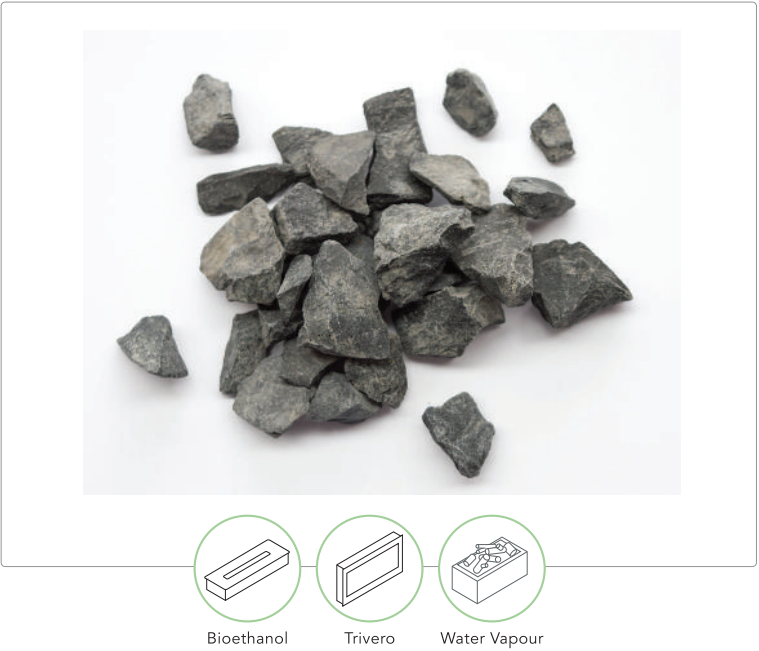

Luxury logset



Logset Resin



Crackling sound effect box



Electric USB lighter



Bioethanol



Bioethanol is entirely comprised of biological products, and hence the combustion of bioethanol results in cleaner emissions (carbon dioxide, steam and heat). Carbon dioxide is absorbed by plants and processed via photosynthesis to help the plant grow. This cycle of creation and energy combustion means bioethanol could potentially be a carbon neutral fuel source.

Bioethanol CL100



C L E A N F I R E S Y S T E M
XARALYN®

A Vreekesweid 30
1721 PR Broek op Langedijk
The Netherlands

E info@xaralyn.com
W www.xaralyn.com



V. 040620 - All rights reserved